

INDOOR      OUTDOOR

Butler S2



CONTROLLER  
512 DMX Channels per output

(A)

TX Connect Data  
Indoor/Outdoor Bridge Cable (5m/16.4ft)

TX Connect Data  
Indoor/Outdoor Bridge Cable (5m/16.4ft)

To additional unit.

To construct a longer Data Bridge Cable,  
use Indoor Data Cable and Outdoor RJ45 Housing.



RJ45 Male Connector Housing IP67

(C)



LED Engine Smart 150W Outdoor

AC 110V/220V 50/60Hz


TX Connect Smart Outdoor Interconnection Cable  
5m/16.4ft, 15m/49.2ft and 30m/98.4ft available



(B)

(D)

Pixel Distributor  
(Included with Mesh RGB)

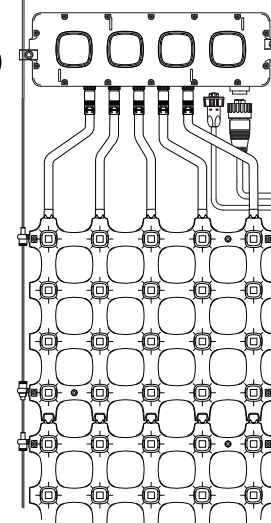

32 Dots  
1937.5mm/76.28"

Dot Pitch:  
62.5mm/2.46"

Mesh RGB

Dot Pitch:  
62.5mm/2.46"

5 Dots

Mesh/String Lead  
Extension Cable (2.5m/8.2ft)  
(Max. 2 extensions per lead)

CABLING LENGTHS

A to B: 100 meters

CONTROLLER to FIXTURE.

C to D: 35 meters

POWER SUPPLY to FIXTURE.

traxon

Please check for the latest updates and changes on the TRAXON website.  
© 2015, TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.  
WWW.TRAXONTECHNOLOGIES.COM

TITLE:

SYSTEM WIRING DIAGRAM

PRODUCTS:

MESH RGB OUTDOOR SYSTEM

DATE:

08 DEC 2015

DWG. BY:

RIMSKY CHENG

SCALE:

NOT TO SCALE

PAGE:

1 OF 1

VER:

1.2